


Product Code: CLRCDP036

Luckinslive 433612861

Description: 13A 2 Gang Type A Passive RCD Switched Socket Outlet

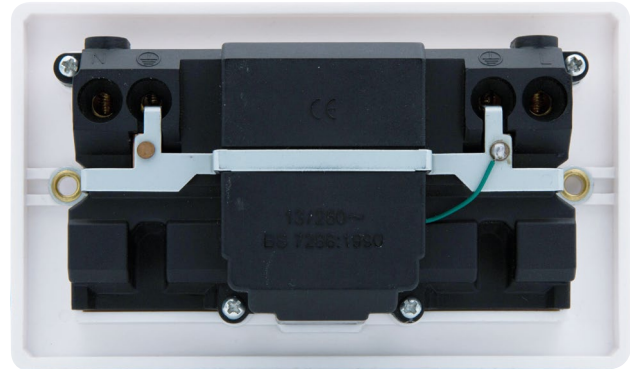

### General Information

|  |  |                                 |  |
|--|--|---------------------------------|--|
| Dimensions (mm)                              | 140 (W) x 80 (H) x 42 (D)                  |                                 |  |
| Plate Fixing Centres - Horizontal (mm)       | 120.6                                      |                                 |  |
| Style  | Metal Clad                                 |                                 |  |
| Colour                                       | Grey                                       |                                 |  |
| Materials                                    | Front Plate & Mounting Box:                |                                 | Insert & Rocker Switch: Urea             |
|  | Electrophoretically Coated Steel           |                                 | Terminals: Brass                         |
|  | Rear Housing: Urea                         |                                 | Contacts: Silver "on-lay" Copper / Brass |
|  | Terminal Screws: Steel & Yellow Passivated |                                 | Earth Strap: Mild Steel                  |
| Internal Busbars: Formed Pressed Brass       |  |                                 |  |
| PCB: Mixed Components                        |  |                                 |  |
| Operating Voltage (AC)                       | 250  | Frequency (Hz)                  | 50                                       |
| Resistive Load Rating (A)                    | 13   |                                 |  |
| Breaking Capacity (A)                        | 250 (Earth Leakage)                        |                                 |  |
| Through Fault Withstand (A)                  | 1500                                       |                                 |  |
| Trip Speed                                   | Less than 40ms at 150mA Residual Current   |                                 |  |
| Termination Type                             | Screw                                      |                                 |  |
| Terminal Size (mm)                           | Ø5   | Terminal Torque Value (Nm)      | 2  |
| Terminal Capacity - Solid (mm <sup>2</sup> ) | 3 x 2.5 or 3 x 4                           |                                 |  |
| Single Pole Switched                         | Yes  |                                 |  |
| Twin Earth Terminals                         | Yes  |                                 |  |
| Supplied Back Box Depth (mm)                 | 40   |                                 |  |
| Back Box Knockouts - Total (mm)              | 7 x Ø20                                    | Back Box Knockouts - Sides (mm) | 1 x Ø20                                  |
| Back Box Knockouts - Top (mm)                | 3 x Ø20                                    | Back Box Knockouts - Rear (mm)  | None                                     |
| Back Box Knockouts - Bottom (mm)             | 2 x Ø20                                    |                                 |  |
| Back Box Earth Terminal Supplied             | Yes  |                                 |  |
| Ingress Protection                           | IP20                                       |                                 |  |
| Operational Temperature (°C)                 | -5 to +40                                  |                                 |  |
| Warranty (Years)                             | 20   | Warranty - Electronics (Years)  | 2  |

**Standards** BS 1363-2, IEC 62640, BS 7288, SASO 2203, IEC 61000-6-1 & IEC 61000-6-3

### Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 The Cable must be routed through the most suitable entry point of the mounting box. When using the Metal Clad back box the top or bottom central knock out should not be used. If the central knock out is required then the CL088 50mm deep backbox may be used.

