

iCON 30S

Stylish toilet, bathroom and utility ventilation



KEY FEATURES

- Low energy mixed flow fan
- Flow rate up to 37 l/s (132 m³/h)
- Stylish, slim and unobtrusive in walls or ceilings
- Recessed or surface mounting
- Different colour covers available
- Unique iris shutter, prevents backdraughts, operates silently
- Interchangeable control modules match fan to installation requirements
- Low Watt motor - 12.2 W
- Low SFP 0.33 W/l/s
- Universal voltage 100 / 240 V - 50 / 60 Hz
- IPX4 rating
- Complies with Building Regulations
- 3 year warranty

iCON 30S

iCON 30S 12 volt low energy fans with brushless DC motors offer significantly reduced energy consumption compared with standard AC motors. Fitted with ball-bearing motors for extra long life, each model is supplied with a remote mounting 100 / 240 V AC to 12 V DC transformer. Stylish, slim and unobtrusive in walls or ceilings.

iCON 30S is designed to provide ventilation levels that comply with the latest Building Regulations.

The iCON fan is an efficient, stylish and unique ventilation solution for the modern home. The shutter design makes switching on and off almost silent and helps reduce external noise ingress. The slim profile and iris shutter of the iCON make it a fan which will blend discreetly into any setting.



MODULES

72573603	PCS	Pull cord
72574204	PCTS	Pull cord with timer
72682307B	DTS	Delayed timer with pull cord
72574202	HTS	Humidity timer with pull cord
72574203	PRTS	Motion sensor timer
72574201	PRHTS	Motion sensor with humidity timer



reddot design award



TECHNICAL DATA

Specification	ICON 30S
Air flow [m³/h / l/s]	132 / 37
Fan type	mixed flow
Mounting position	wall / ceiling
Sound pressure @ 3 m [dB(A)]	36.2
Power [W]	12.2
Specific Fan Power [W/(l/s)]	0.33
Building regulations	compliant
Duct diameter [mm]	100
Supply voltage	12 V DC transformer
Ingress protection rating	IPX4
Max ambient temperature [°C]	40
Weight [kg]	0.84
Dimensions H x W x D [mm]	225 x 225 x 144
Part number	72683801

COVERS

Colour	Part No.	Colour	Part No.
Silver	52634507	Ultimate Grey	52634517
Sandstone	52634508	Turquoise	52634518
Anthracite	52634506	Navy Blue	52634519



Sandstone



Silver



Anthracite



Ultimate Grey




Turquoise




Navy Blue

DIMENSIONS (mm)

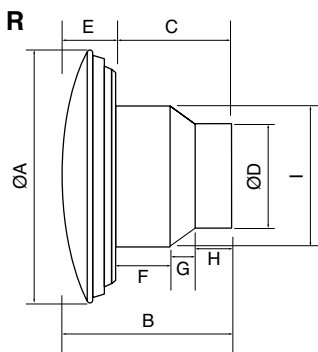


R = Recessed without skirt

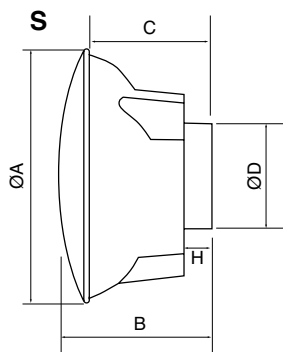

S = Surface mounted with skirt

Model	A	B	C	D	E	F	G	H	I
iCON 30S (R)	225	144	92	97	43	51	20	30	148
iCON 30S (S)	225	144	101	97	-	-	-	29	-

PERFORMANCE

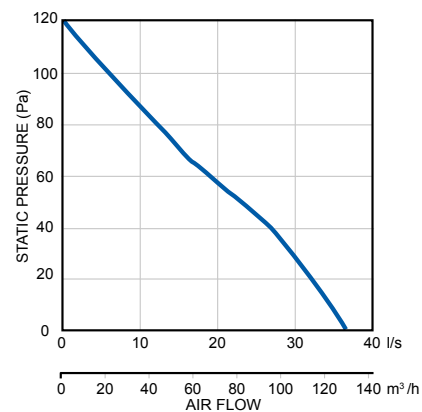

CONTROLS AND ACCESSORIES

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80000800 - Issue 3 02/22