

APRILEDP/WW



Features

220-240V IP65 dimmable LED fire rated performance downlight Remote driver with 2x1.5mm² + CPC loop-in, loop-out colour coded push fit piano terminals provide an easy and efficient installation Detachable LED driver for fast fix install Low profile design and remote driver allow installation into shallow ceiling voids Fully tested for 30, 60 and 90 minute ceiling types to meet Part B of building regulations Fully tested to meet Part C (moisture), Part E (acoustic) and Part L (energy) of Building Regulations Wide 60° beam angle for increased light distribution LED lifespan L70 60,000 hours



General Information

Lamp Type	LED
Colour / Finish	Matt white
Dimmable	Yes
Fire Rated	Yes
OCTO Compatibility	Smart Indoor controller
IP Rating	IP65
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	90
Height (mm)	55
Accessories	APRILEDPBZ/CH, APRILEDPBZ/SC, APRILEDPBZ/BLK, AORBLED/DIMMER

Technical Information

Wattage	6W
Lumens Delivered	532lm
Lm/W	89lm
Beam Angle	60
CRI	Ra 80
сст	3000K
Input	230V
Hertz	50/60Hz
Operating Temp	-5°C to 25°C






Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Suitable for wall mounting	No
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for traverse mounting	No
Suitable for pedestal/floor mounting	No
Suitable for light-track mounting	No
Adjustability	Not adjustable
With movement sensor	Νο
With light sensor	Νο
With light source	Yes
Suitable for number of lamps	1
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
Beam angle	Wide beam 41-80°
Degree of protection (IP)	IP65
Protection class	1
Max. system power	6 W
Colour of light	White
Colour temperature	3000-3000 K
Colour rendering index CRI	80-89
Rated luminous flux acc. IEC 62722-2-1	532 lm
Lamp efficacy	89 lm/W



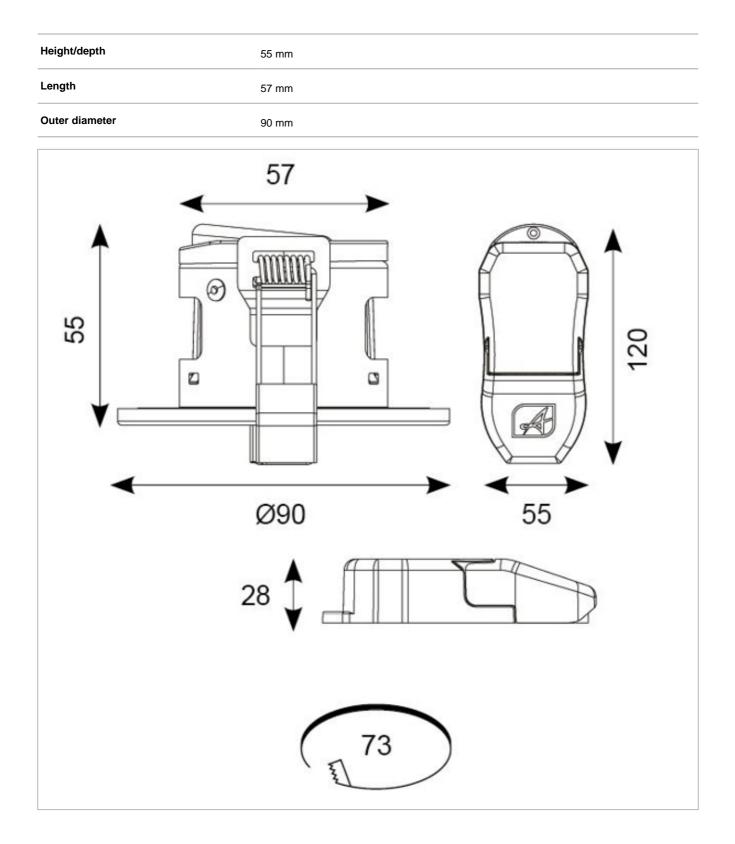

Datasheet generated from https://onetimepim.com last updated Monday, September 6, 2021 12:47:32 PM

A