




- Dual screw terminations for secure connection of conductors (4mm allen key)
- Secure cover with wire locking screw (3mm allen key)
- Ingress Protection IP20
- Retained shutters for blanking of unused cable entries
- Colour coded for easy identification of phase / neutral / earth

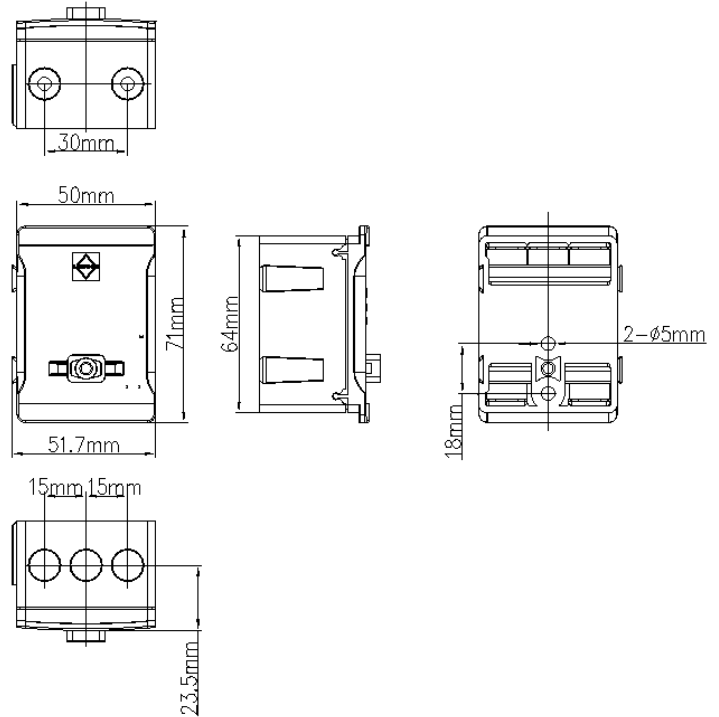

### Electrical Data

Operating Voltage	230/400VAC
Rated Current	100A

### Mechanical Data

Ingress Protection Rating	IP20
Terminal tightening torque	3Nm
Glow wire test	TR-20230170-01
Mounting	Wall Mounting
Product Net Weight	0.17
Entry cable sections (mm <sup>2</sup> )	2.5-35mm <sup>2</sup>

### Packaging Data

### Relevant Standards

- BS EN60998-1, BS EN 60998-2-1

Lewden Ltd.

Unit 4, Bradbury Drive, Springwood Industrial Estate,

Braintree, Essex, CM7 2SD

Tel +44 (0)1376 336200

[www.lewden.com](http://www.lewden.com)