




7040 LED

Alimentatore elettronico dimmerabile a cursore, da pavimento per moduli LED a corrente costante CDT (vedi tabella). Per uso indipendente.

Floor dimmable electronic power supply unit with cursor for direct current LED modules CDT (see table). For independent use.

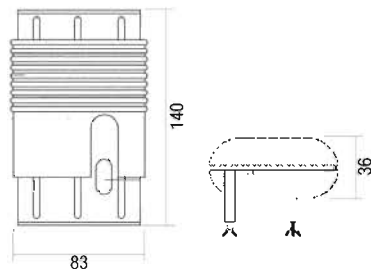

Multi Powerled

Codice Code	LPH ↓mm	Vdc IN	Vac IN	Hz	IP20	IC	ta °C	tc °C	PFC	Euro Cad.
RL4720/Led	140x83x36	176-264	110-240	50/60	25	20A 170μS	0..35	85	OK	36,00

		CDT															
Iout	mA	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050
Vout	Vdc	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48
Power	W	14	17	19	21(20)	24 (20)	26 (20)	28 (20)	30 (20)	32 (20)	34 (20)	36 (20)	38 (20)	40 (20)	40 (20)	40 (20)	40 (20)
N° LED*	min-max	1÷15	1÷15	1÷15	1÷15	1÷15	1÷15	1÷15	1÷14	1÷14	1÷14	1÷14	1÷14	1÷14	1÷13	1÷13	1÷12
* LED typical VF 3,2V		COB															

Norme di riferimento

Reference norms

EN 55015
EN 61000-3-2
EN 61000-3-3
EN 61347-1
EN 61347-2-13
EN 61547
EN 62384

Caratteristiche tecniche

- Alimentatore multipotenza dimmerabile fornito di dip-switch per la selezione della corrente in uscita.
- Regolazione a cursore.
- Accensione e spegnimento con interruttore.
- Alimentatore indipendente IP20, per uso interno.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Uscita in corrente costante (CDT).
- Protezioni:
al cortocircuito;
contro le extra-tensioni di rete;
contro i sovraccarichi.
- Morsetti di entrata e uscita sullo stesso lato.
- CDT connessione moduli led in serie
- Colore: Nero, a richiesta colore trasparente, (4740/Led).

Technical features

- Dimmable multipower power supply unit equipped with a dip-switch to select the output current.
- Cursor adjustment.
- Switch on and off with switch.
- IP20 independent power supply unit, for indoor use.
- Class II protection against electric shocks by direct and indirect contact.
- Constant current output (CDT).
- Protections:
against short circuit;
against extra network voltage;
against overloads.
- Input and output terminals on the same side.
- LED modules CDT connection in series
- Colour: Black, transparent colour (4740/Led) on request.



Esempio applicativo - Application example

