


NouLine



- High performance LED batten suitable for industrial applications and ancillary areas
- High efficiency up to 145lm/W
- Excellent light uniformity through high transmittance polycarbonate diffuser
- Instant light output with unlimited switching
- Push fit terminals for ease and speed of installation
- Multiple conduit entry and BESA fixing points
- Non-dimmable

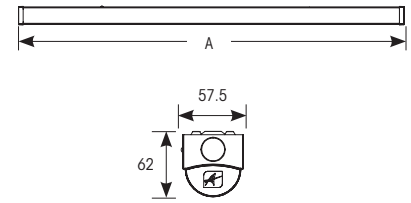

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
200/240V	50/60Hz	-20°C to 30°C	L70 54,000	Ra 80	6	110/150°	1	IP20	IK**

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LMW	A
ANOU4/1	Cool White - 1 x 1200mm	20W	4000K	2700lm	130lm/w	1170mm
ANOU5/1	Cool White - 1 x 1500mm	28W		3600lm		1470mm
ANOU6/1	Cool White - 1 x 1800mm	38W		5000lm		1770mm
ANOU2X4/1	Cool White - 2 x 1200mm	37W		5000lm	1170mm	
ANOU2X5/1	Cool White - 2 x 1500mm	50W		6500lm	1470mm	
ANOU2X6/1	Cool White - 2 x 1800mm	50W		7200lm	145lm/w	1770mm

CODE (OPTIONS)	DESCRIPTION
/SM3	Self-Test emergency