

## AZPELED/1



### Features

Robust LED low/high bay for industrial, commercial and retail applications

Die-cast powder coated construction and heatsink for optimum thermals and performance

Alternative installation options by means of drop rods, jack chain and catenary wire. Bracket accessories available for ceiling or wall mounting

100W exceeds performance of 150W HQI

High specification IP65 and IK08 ratings

Pre-wired with 3M of H07RN-F cable for ease and speed of installation

LED lifespan L80 B10 54,000 hours

1-10V dimmable as standard

To programme these fittings on site you would need to order 1 x AZLED/MWSP as the fittings no longer come with an inbuilt dipswitch

## General Information

Lamp Type	LED
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface/Suspended
LED Life	L80 B10 54,000hrs
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	308
Depth (mm)	169.5
Accessories	AZPELED/FB1, AZPELED/REF



## Technical Information

Wattage	100W
Lumens Delivered	15250lm
Lm/W	152lm
CRI	Ra 80
CCT	4000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	-30°C to 45°C

## Technical Data - ETIM - High bay luminaire (EC001716)

Mounting method	Pendant
With light source	Yes
Suitable for number of lamps	1
Material housing	Aluminium
Nominal voltage	220-240 V
Control gear included	Yes
Dimming 1-10 V	Yes
Light distributor	Diffuser lens/optic/panel
Degree of protection (IP)	IP65
Impact strength	IK08
Protection class	I
Max. system power	100 W
Rated luminous flux acc. IEC 62722-2-1	15250 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Height/depth	169.5 mm
Outer diameter	308 mm
Suitable for emergency lighting	No

Datasheet generated from <https://onetimepim.com> last updated Friday, February 18, 2022 12:22:28 PM

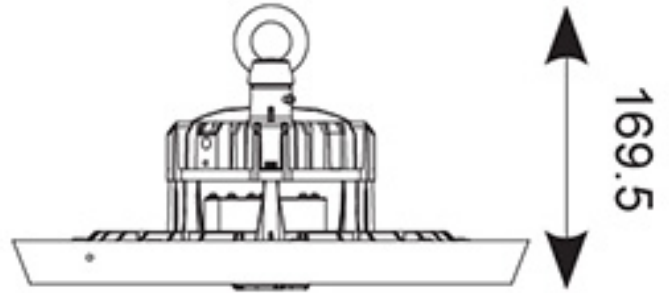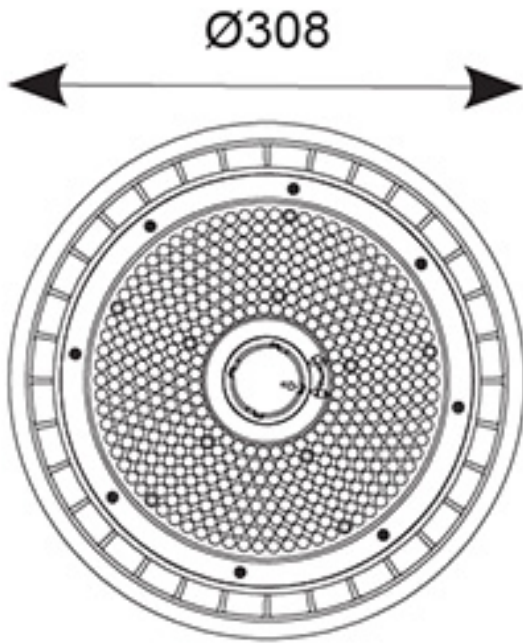

AZPELED/1