


Plug - with screwless terminals, for harsh applications

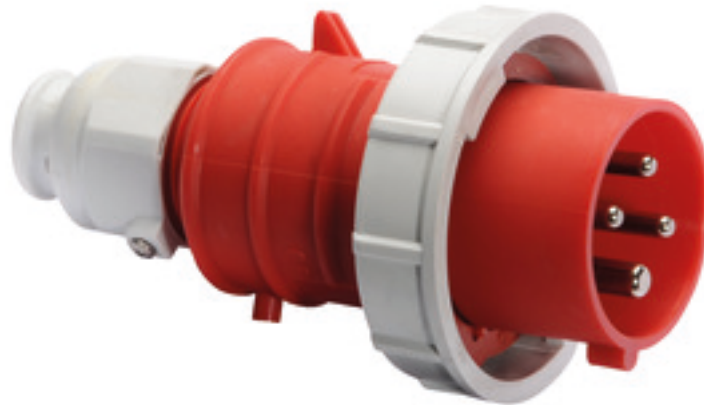

Product description	
BALS-Prd.-Nr	21351
EAN	4024941213516
product category (PG)	QUICK-CONNECT TE plug
current (A)	32A
number of poles (P99)	4p
number of poles (P)	3P+PE
position of earth contact (H)	6 h
voltage (V)	380 up to 415V
frequency (HZ)	50 and 60Hz

Product description	
protection degree (SA)	IP67
colour code 1 (KF1)	red RAL 3000
Colour of appliance	Housing cover red RAL 3000, Collar red RAL 3000, Bayonet ring grey RAL 7035, Cable gland grey RAL 7035
connection design (AT)	screwless spring-clamp technology
maximum conductor size (LQ)	6,0 qmm
cable entry (KE)	Cable gland
Height	180mm
Width	94mm
Depth	94mm
material of enclosure (GM)	Polyamide
contact	The contact carrier is made of high temperature resistant material, the contacts are brass nickel plated

Additional technical information	
	For cable diameter from 11 up to max. 23,5 mm, Multi-Grip cable gland with gasket, integrated cable clamp and additional water evacuation openings

Logistics data	
Weight/pcs	0.293 kg / Piece
Packaging	Bag
Content amount	1 ST
EAN	4024941213516

Logistics data	
Length	94 mm
Width	94 mm
Height	180 mm
Weight	0.294 kg
Volume	1,590.48 ccm
Packaging	Carton
Content amount	10 ST
EAN	4024941941716
Length	325 mm
Width	217 mm
Height	210 mm
Weight	3.136 kg
Volume	13,588.4 ccm

