

DBSR Range

125A TP&N Distribution Board (Surge Compatible) Datasheet




CONSTRUCTION AND FEATURES:

- 4 pole, 125A isolator included
- isolates all phases and neutral
- Surge compatible
- knockout space to right of isolator for 4 pole SPD (SPD sold separately)
- Up to 18 three phase ways
- Solid steel design, 1.2mm
- Durable paint finish

TECHNICAL DATA:

- Voltage rating: 400-415V AC, 50/60Hz
- Current rating: 125A, 3 phase
- Isolator: 125A, 4 pole
- Available sizes: 4, 6, 8, 10, 12, 14, 16 & 18 (3 phase ways)
- IP30
- For use with:
 - MC 6kA MCBs
 - MH 10kA MCBs
 - ROSB 10kA RCBOS
 - Type 1+2 and Type 2 SPDs
- Conforms to: BS EN 61439-3
- 18th Edition compliant

DIMENSIONAL SKETCH:

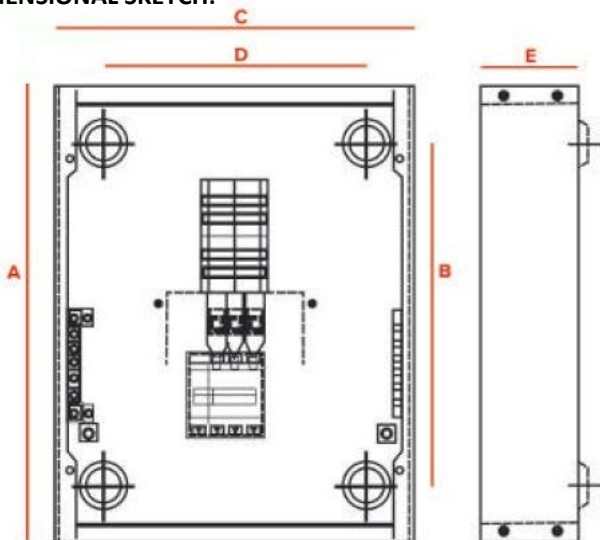

NOTE: COVER PAN ASSEMBLY
WHEN DRILLING GLAND HOLES

	A	B	C	D	E	WEIGHT (Kg) Approx.
DB04/125SR	450	350	450	335	98	10
DB06/125SR	504	394	450	335	98	11.2
DB08/125SR	558	448	450	335	98	12.4
DB10/125SR	612	502	450	335	98	13.7
DB12/125SR	666	556	450	335	98	14.7
DB14/125SR	720	610	450	335	98	15.8
DB16/125SR	774	664	450	335	98	17
DB18/125SR	828	718	450	335	98	17.9

