elucian

Technical Specification

Product Code: GUEB563RCD3 **Description:** 5 Way Mini Metal Unit (Garage) with 63A RCD (3 Free Ways)

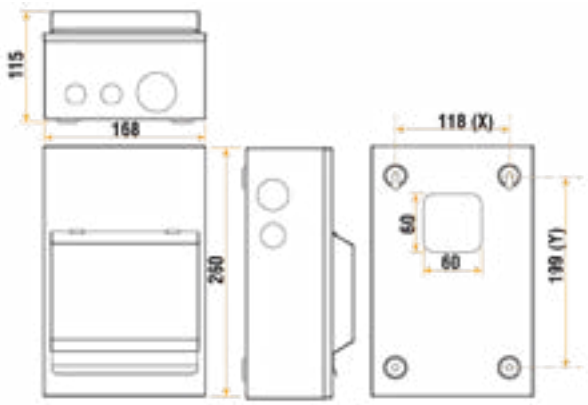

General Information

Dimensions With Door (mm)	168 (W) x 260 (H) x 115 (D)		
Enclosure Dimensions (mm)	168 (W) x 260 (H) x 92 (D)		
Finish	White (RAL 9003)		
Materials	Enclosure & Cover: Powder Coated Steel	DIN Rail: Galvanised Steel	
Frequency (Hz)	50/60		
Maximum Rated Current (A) (In)	63		
Free Ways	3		
Total Ways	5		
Device Terminals	Screwed Lug & Pin		
RCD Installed	1 x 63A 30mA RCD (CU2RCD63A)		
RCD Terminal Capacity (mm²)	16	RCD Terminal Torque (Nm)	2.5
Blanks Supplied	1 (Product Code: CU1BLANK)		
E&N Terminals	Screw		
E&N Bars Capacity (mm²)	16	E&N Bars Torque (Nm)	2
Tail Clamp Capacity (mm²)	25	Tail Clamp Torque (Nm)	1.5
Enclosure Side Knockouts (Ømm)	1 x 25 & 1 x 32		
Enclosure Top Knockouts (Ømm)	2 x 20 & 1 x 40		
Enclosure Bottom Knockouts (Ømm)	2 x 20 & 1 x 40		
Enclosure Rear Knockouts (mm)	60 x 60		
Impact Rating	IK05		
Ingress Protection	IP20		
Maximum Humidity (%)	95		
Storage Temperature (°C)	-40 to +75		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	10	Warranty - Devices (Years)	3

Standards BS EN 61439-3, BS EN 61008-1

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth.
Elucian metal consumer units allow compliance with BS 7671 Wiring Regulations

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

DoC Installation